

# CI Series Surge Protective Devices

High capacity Type 1,2 SPDs for overvoltage protection on switchgear and power distribution panels



## Introduction

The CI Series of surge protective devices are tested by Underwriters Laboratory and Listed to UL 1449, 4th Edition to help ensure equipment is protected with highly reliable surge protection technology. Delta and Wye system units are available in three configurations to increase application flexibility. The CI Series is for installation external to an electrical enclosure or panelboard. Application of CI Series units throughout a facility will help ensure that equipment is protected.

## Applications

CI Series units are available for common Delta and Wye system voltages in a variety of surge current capacity ratings from 120kA to 400kA. Available in three configurations, the CI Series' features and options make it easy to specify units for many electrical applications including service entrances, distribution switchboards, panelboards and point-of-use. All possible combinations of product attributes are available

## ● Features

- thermally protected Metal Oxide Varistor (MOV) technology to safely shunt overvoltages to ground while its thermal disconnect capability eliminates the need for additional fusing
- 200kA SCCR meets the highest NEC requirements
- Models available to meet the overvoltage protection needs of Wye and Delta electrical systems from 208 to 600 volts, 3-phase
- SB+ Series has the highest nominal discharge current (In) of 20kA per UL 1449 4th Edition. This rating indicates the SPD's ability to handle a number of large-magnitude surges over a short period of time and remain operational.
- 120kA to 400kA surge current capacity (Imax) ratings meet the needs of larger switchgear and power distribution panel applications
- Optional Form C contact relay, EMI/RFI filtering and surge counter available to meet additional system requirements.
- 200kA Short-Circuit Current Rating (SCCR)

● Specifications

- Frequency (Hz)

- Protection Mode

- Degree of protection

- Diagnostics

- Connection & Mounting Method

- Internal Disconnecter

- Size of connecting wir

- Optional Functions
- : 50/60

: L-N / N-PE

: IP 20

: Green LEDs (Protected) / Yellow LEDs (Check) / Red LEDs (Replace)

: Parallel Connection Type / Wall Mounting

: Thermal Runaway Multi-Fusing Protection

: 10 ~ 16 mm<sup>2</sup> (or # 7 ~ 5AWG)

: Window management program / ModBus RS485 / Ethernet

: Surge counter / Overvoltage counter / Real-time voltage


: Remote contact / Leakage current / Inside temperature

: Status indicator (Green -> Yellow -&; Red)


: Power noise filter

Model No.		SBCI+PS1-13S3P/50G	SBCI+PS1-25S3P/100G
Rated System Voltage		Tri-Phase 110~440V 4W+GND	
MCOV (Vac)		110 ~ 320	
$I_n$ (kA) / $I_{imp}$ (kA) -8/20 $\mu$ S- / -10/350 $\mu$ S-	L-N	40 / 12.5	80 / 25
	N-PE	50 / 50	100 / 100
VPR (Vpk) (kV)	L-N	1.2	1.3
	N-PE	1.8	2.0
SCCR (kA)		200	200

● Circuit Diagram

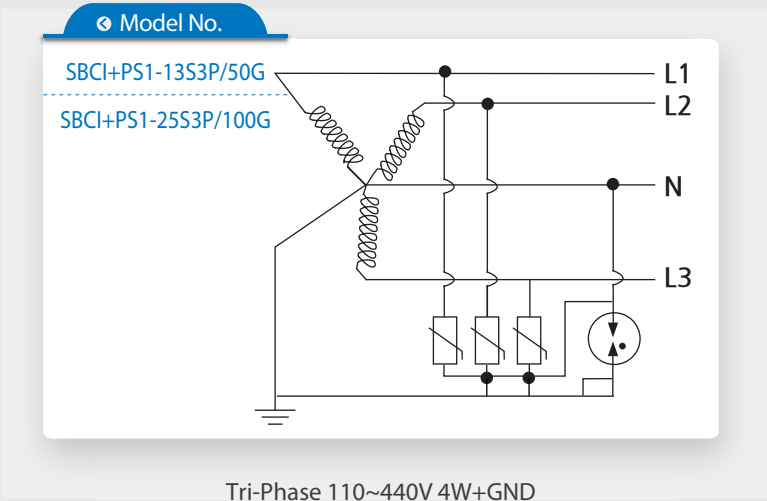

● Dimension

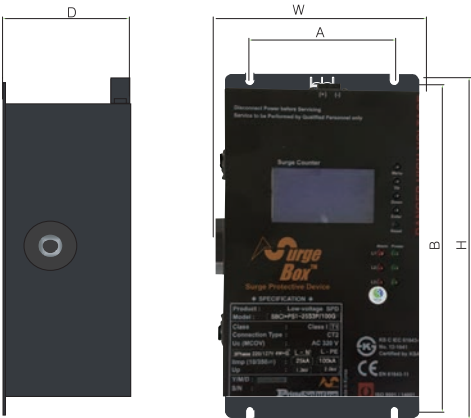

	Size (inch/mm)
W	6.88 / 175
A	4.17 / 106
B	9.44 / 240
H	9.84 / 250
D	4.37 / 111