

SB Series

Type 1 (Single-Phase AC Lines)




Specifications

- Frequency (Hz) : 50/60
- Protection Mode : L-N / N-PE
- Degree of protection : IP 20
- Diagnostics : Green LEDs (Protected) / Red LEDs (Replace)
- Connection & Mounting Method : Parallel Connection Type / Wall Mounting
- Internal Disconnecter : Thermal Runaway Multi-Fusing Protection
- Size of connecting wir : 10 ~ 16 mm² (or # 7 ~ 5AWG)
- Optional Functions : Remote Contact


Model No.	SB385-160R	SB385-120R
Nominal Voltage Rating	Single-Phase 110~440V 2W+GND	
MCOV (Vac)	110 ~ 320	
I_{imp} (kA) -10/350 μ S-	12.5	6.5
I_{max} (kA) -8/20 μ S-	200	200
VPR (Vpk) (kV)	2.0	2.0
SCCR (kA)	200	200

Dimension

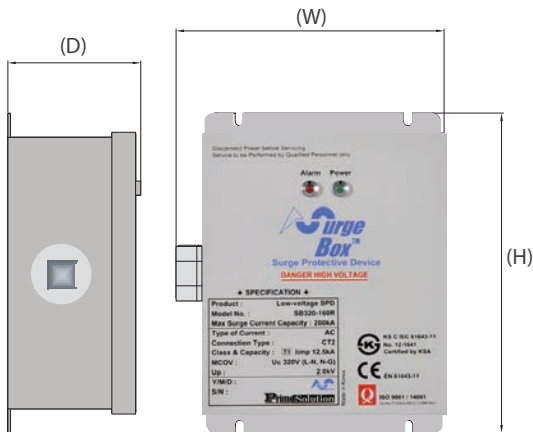

	Size(inch/mm)
W	6.61 / 168
H	7.87 / 200
D	3.26 / 83

● Circuit Diagram

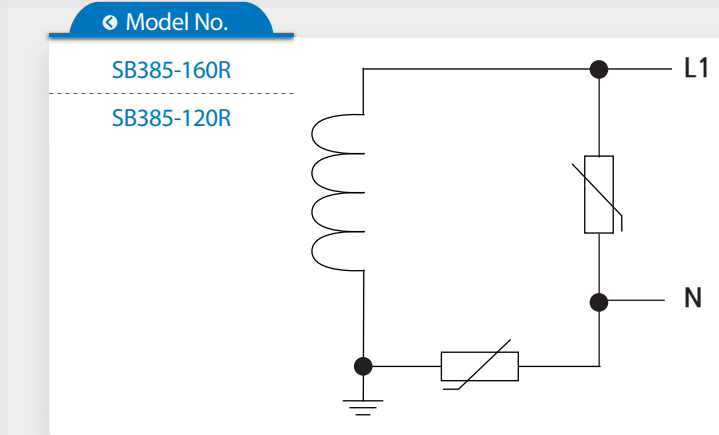

memo



HEAD OFFICE

3960 West Point Loma Blvd. Ste. H San Diego, CA 92110

John Park Director / Technical Support Dept.

Tel : +1-858,282,0901

johnpark@primepowersolutions.com

www.PrimePowerSolutions.com